

## Technical Data Sheet


**Polythene enclosed thermal insulation for suspended ceilings consisting of glassfibre fully enclosed in polythene.**

### PRODUCT

Polythene Enclosed Glassfibre Roll MP541 is designed to provide a thermal insulation solution within suspended ceiling applications.

The product limits fibre migration within the suspended ceiling zone and is specifically suited to sensitive areas such as office environments.

Can be supplied glued within the polythene for use in vertical situations such as agricultural applications.

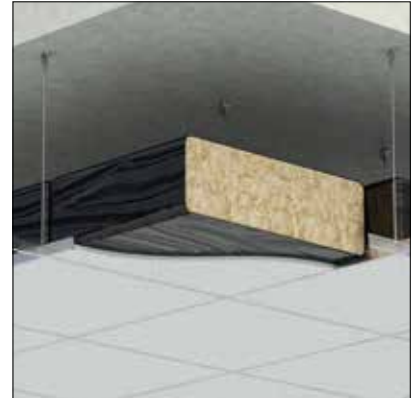

Polythene Enclosed Ceiling roll MP541 fitted above a suspended ceiling.

POLYTHENE ENCLOSED ROLL MP541	
15m - 1200 x 60mm	15m - 600 x 60mm
11.25m - 1200 x 80mm	11.25m - 600 x 80mm
9.17m - 1200 x 100mm	9.17m - 600 x 100mm
6.03m - 1140 x 150mm	6.03m - 570 x 150mm
5.2m - 1140 x 200mm	5.2m - 570 x 200mm
3m - 1140 x 250mm	3m - 570 x 250mm
3m - 1140 x 300mm	3m - 570 x 300mm

Other sizes and thicknesses are available upon request.

### PRODUCT PERFORMANCE

THICKNESS	R VALUE
60mm	1.36m <sup>2</sup> K/W
80mm	1.81m <sup>2</sup> K/W
100mm	2.27m <sup>2</sup> K/W
150mm	3.40m <sup>2</sup> K/W
200mm	4.54m <sup>2</sup> K/W
250mm	5.68m <sup>2</sup> K/W
270mm	6.13m <sup>2</sup> K/W
300mm	6.81m <sup>2</sup> K/W

### SPECIFICATION

- Polythene enclosed glassfibre
- Excellent thermal performance
- Easy to install
- Prevents fibre migration within the ceiling void
- Available in a range of sizes