

Thermafire A2 Foil Faced Slab - 1 sided


Technical Data Sheet



Thermafire A2 Foil Faced Slab 1 Side is a 'limited combustibility' product intended for use as both thermal and acoustic insulation.

It can be used at spandrel panel locations within glazed curtain wall systems as well as a myriad of other applications.

The product, available in various densities and thicknesses, addresses fire safety requirements (Approved Document B) whilst facilitating thermal resistance values (Approved Document L) and providing resistance to the passage of sound synonymous with stone mineral wool insulation (Approved Document E).

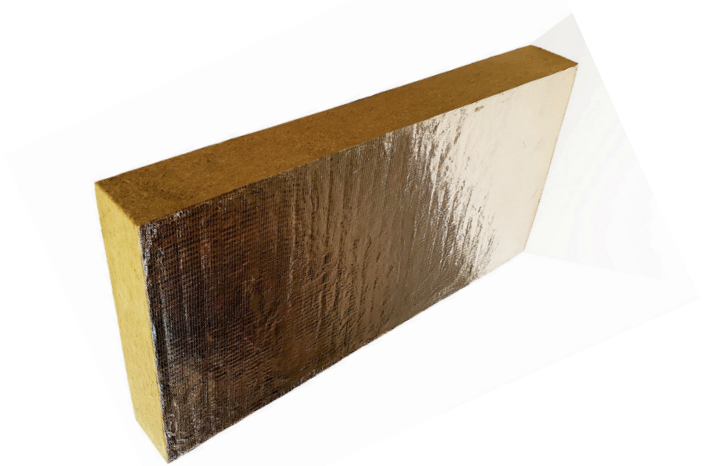

FEATURE	BENEFIT
Reaction to Fire A2-s1,d0	Deemed 'limited combustibility', can be used in all construction locations
Range of thicknesses (25 to 250mm)	Permits design of thermal performance to suit the construction
Range of densities (45, 60, 80, 100kg/m³)	Permits adjustment of thermal and/or acoustic properties
Foil Facing	Provides an effective vapour barrier and prevents fibre migration
Bespoke sizes available	Project specific designs can be made without generating waste on site
Standard 1200 x 600mm slabs can be cut to size on site	Flexibility to suit site needs

Management Systems

Certified as meeting the requirements of ISO 9001, ISO 14001, ISO 45001.

NBS

Our products can be found on NBS Source.

Storage and Handling

- keep the product dry and undercover
- suitable handling equipment will be required for bulky products or pallets
- DO NOT stack products or pallets as these will become unstable

Installation

Dependent upon the OEM requirement or site specific detailing.

Operation

The product is intended to be static post installation. There is no operator involvement in its use.

Maintenance

The products intended use and design, along with its often-inaccessible location post construction, means there are no maintenance requirements.

PHYSICAL PROPERTIES

Length	Width	Density	Thickness
1200mm	600mm	45-100kg/m³	25-250mm

Facing	Foil-faced 1 side								
Reaction to Fire Classification (BS EN 13501-1:2018)	A2-s1,d0								
Thermal Conductivity (W/mK)	<table> <tr> <td>45kg/m³</td><td>0.035</td></tr> <tr> <td>60kg/m³</td><td>0.034</td></tr> <tr> <td>80kg/m³</td><td>0.034</td></tr> <tr> <td>100kg/m³</td><td>0.034</td></tr> </table>	45kg/m³	0.035	60kg/m³	0.034	80kg/m³	0.034	100kg/m³	0.034
45kg/m³	0.035								
60kg/m³	0.034								
80kg/m³	0.034								
100kg/m³	0.034								
Thermal Resistance (m²K/W)	Dependent upon the overall product thickness. Ask our technical team for this information								
Field of Application	Classification valid for: <ul style="list-style-type: none"> - Fire to foil side - Without air gap/void - Product thickness 25-250mm - All product dimensions - Horizontal and vertical joints - Mineral wool density 45-100 kg/m³ - A1* or A2-s1,d0 substrate with a minimum density of 525 kg/m³ - Any end use metal substrate melting point equal to or greater than 500°C 								

* Decision 96/603/EC (Class A "no contribution to fire") includes glass, heat strengthened, chemically toughened, laminated and wired.

Health & Safety

- dry working by cutting or handling non-encapsulated products may release fibre dust
- use suitable PPE for site hazards
- where possible use on tool dust extraction with HEPA filter
- "Machine Made Mineral Fibre" the primary material has workplace exposure limits in HSE EH40

Packaging & Product Disposal


- pallets can be readily re-used
- pallet wrap / covers should be placed in an appropriate waste stream
- the product remains in the construction until refurbishment or demolition as such the project lead should apply the contemporary national and local regulations for waste

Specific Application:
INSULATED GLAZED SPANDREL PANEL


Mayplas Thermafire A2 Foil Faced Slabs offer fire, acoustic and thermal performance all in one solution.
Suitable for use in a wide range of construction applications including spandrel panel locations in curtain wall systems.
Available in a variety of densities and thicknesses to suit the project site requirements.

Further for information and advice contact
sales@mayplas.co.uk

Typical Insulated Glazed Spandrel Panel
FRONT ELEVATION
External view of an uninterrupted spandrel

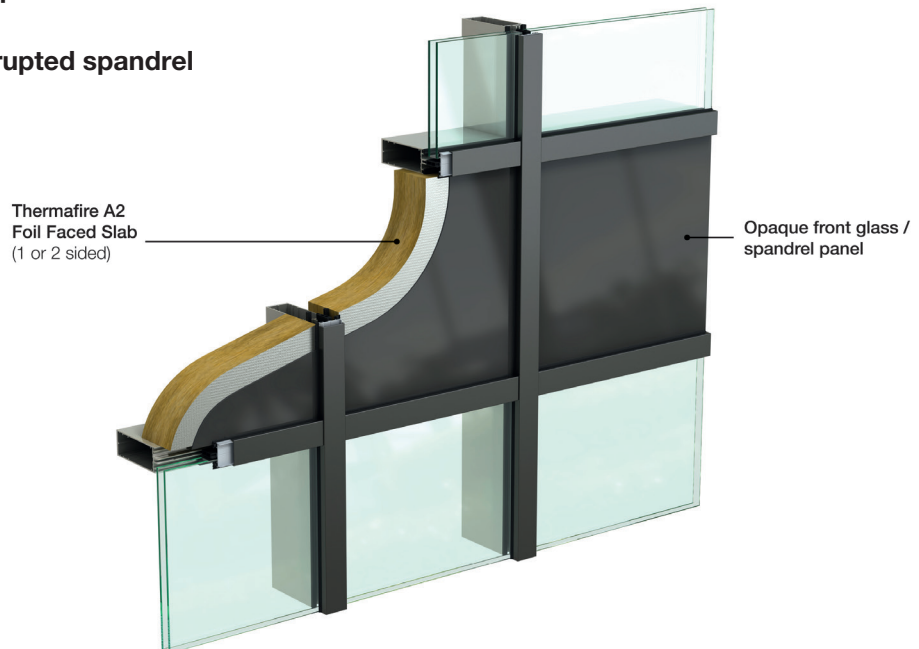

Typical Insulated Glazed Spandrel Panel
REAR ELEVATION
Internal view of an uninterrupted spandrel

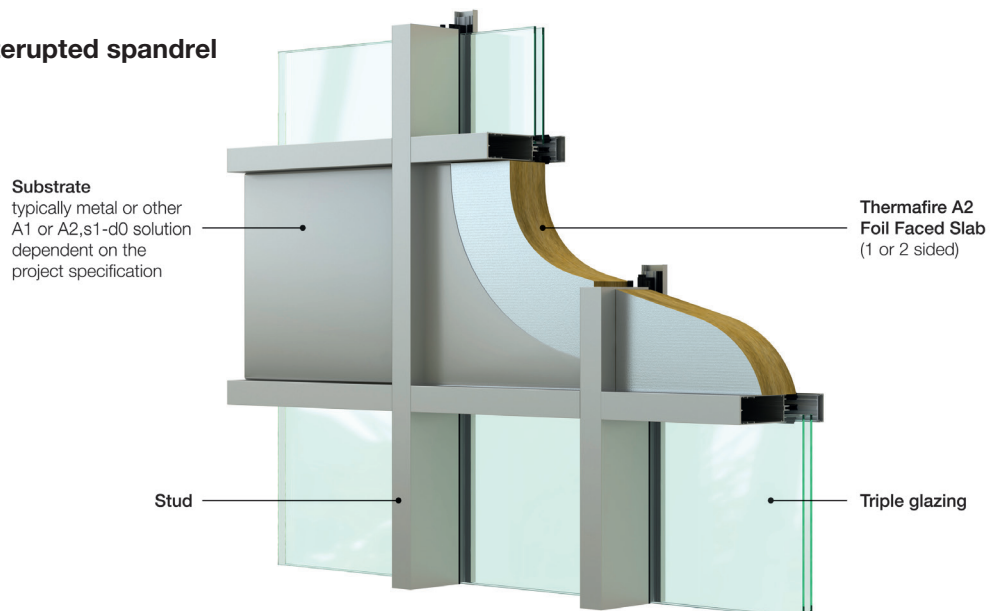

Images intended for illustrative purposes only.